


PRODUCT FEATURES

Chime unit



- Chime selection
- Volume control
- Operating mode selection



- Chime sound only
- LED alert light only
- Both together

Blue flashing chime alert

Chime unit stand



Bell push




Battery cover

1

BATTERY INSTALLATION

Bell push



- Insert a flathead screwdriver under the tab on the bottom of the bell push to lift it slightly.
- Hold the battery cover still and slide the bell push upwards to separate




- Insert a coin into the slot on the waterproof cover and turn anti-clockwise to remove. Insert 1 x CR2032 button cell battery, ensuring it is positive (+) side up. Refit the battery cover, ensuring the 'O' ring is in position.

2

QUICK SET UP GUIDE


Pairing

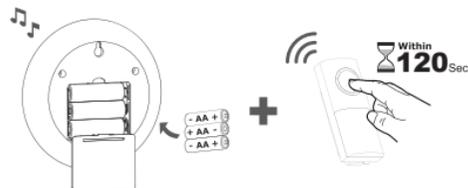

Remove the battery cover on the back of the chime unit and insert 3 x AA batteries, observing the polarity markings. You will hear a "Ding Dong". Within 120 seconds press the button on the bell push. The chime will sound and the pairing is complete.

Chime selection


Press the chime selection button to cycle through the 30 melody sounds. Stop when you hear the one you want.



3


QUICK SET UP GUIDE cont.

Volume control



Press the volume button to cycle through the 4 options (in descending volume). Stop when you hear the one you want.

Operating mode selection



Press the operating mode selection button to cycle through the 3 options:

- Chime sound only
- Flashing blue LED chime alert light only
- Both together

4



INSTALLATION

Test the units in their intended locations before you fix them in place.

The operating range will be reduced if the bell push is mounted on metal or double uPVC door frames. Electrical/wi-fi equipment and the number of walls between the bell push and the chime unit will also reduce the operating range.


Bell push

- Adhesive pad
- Screws




Chime unit stand

There is a slot at the bottom of the back of the chime unit. For use free standing, insert the supplied stand into the slot as per the diagram.

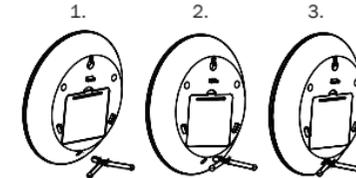

5

SPECIFICATION



Power supply: 3 x AA batteries
Type R2 device



Power supply: 1 x CR2032 button cell battery
Frequency: 433.92MHz
Operating temp: -5°C to 55°C



Hereby Uni-Com declares that the radio equipment type door chime is in compliance with Radio Equipment Regulations 2017 (SI 2017/1206) and Directive 2014/53/EU. The full text of the UKCA Declaration of Conformity is available to view at www.uni-com.co.uk

6

TROUBLESHOOTING

Adding extra chime units


All **wireless +** Uni-Com door chimes work together and you can add unlimited chime units to your set up. To add an extra chime unit repeat the pairing procedure with the new chime unit.

Adding extra bell pushes

A **wireless +** bell push will work with all **wireless +** door chimes. A maximum of 8 bell pushes can be paired to the same chime unit. To add an extra bell push repeat the pairing procedure with the new bell push.

Chime sounds when nobody is pressing the bell push

Your chime unit may be picking up outside interference from other wireless transmitters.



Clear the chime unit memory by pressing and holding the chime selection button for 20 seconds until a "Ding Dong" sound is heard. Repeat the pairing procedure.

7

TROUBLESHOOTING cont.

Chime doesn't sound when bell push is pressed

Does the blue LED bell push indicator light illuminate when it is pressed?

If NO:

1. Check the bell push battery to ensure has been installed correctly.
2. Replace the bell push battery.

If YES:

1. Replace the batteries in the chime unit.
2. The chime unit may not be receiving signal from the bell push. Move the chime unit closer to the bell push.
3. The chime unit may be picking up outside interference from other wireless transmitters. Clear the chime unit memory and repeat the pairing procedure.




Made in China



8

SAFETY WARNING

Chime unit is for indoor use only. The bell push is weather resistant, do not submerge. If cleaning of the chime unit is required, wipe the unit with a dry cloth. Do not use if casing of the chime unit becomes cracked or damaged. Exhausted batteries must be removed immediately. Failure to follow these instructions could result in fire, electric shock, injury or damage to persons, product or property and will invalidate the guarantee.

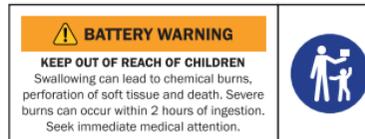

Batteries

The bell push uses 1 x CR2032 button cell battery and the chime unit 3 x AA batteries. All batteries should be removed prior to disposal. Help the environment by disposing of your products and batteries responsibly.

Guarantee

This product is guaranteed for one year from the date of purchase against faulty parts or workmanship. It does not cover batteries or physical damage to the units. Proof of purchase required. This does not affect your statutory rights.

9

UNI-COM

Extra loud door chime

Model: 68686

Operating Instructions

Uni-Com

Long Reach, Galleon Boulevard,
Crossways Business Park,
Dartford, Kent, DA2 6QE,
United Kingdom

Email: info@uni-com.co.uk
Web: www.uni-com.co.uk

QFF Distribution LTD

24 Magna Drive,
Magna Business Park,
Citywest Road, Dublin 24,
D24 FNYO, Ireland

©2025 Uni-Com. All rights reserved.